

BREEZE SERIES

Being free,
as breeze

- Indoor | Fixed installation
- Compact solution for wall-mounted cases



Application


- Retails & Street Stores
- Gym & Stadium
- Indoor cases with rear space limited



Specification List

Product Name	Breeze-1.9	Breeze-2.6	Breeze-2.9	Breeze-3.9
Pixel Pitch (mm)	1.953	2.604	2.976	3.906
Pixel Density (dot/m ²)	262,144	147,456	112,896	65,536
Module Size (mm)	250*250			
Panel Size (mm)	1000*250*53.17/ 750*250*53.17	1000*250*53.4/ 750*250*53.4	1000*250*53.3/ 750*250*53.3	1000*250*53.42/ 750*250*53.42
Panel Resolution (dot)	512*128/384*128	384*96/288*96	336*84/252*84	256*64/192*64
Panel Material	Die-casting+Aluminum			
Panel Weight (kg/pcs)	6.4/5			
Brightness (cd/m ²)	800	1000	1000	1200
Horizontal & Vertical Viewing Angle (Deg)	160/140			
Contrast Ratio	4000:1			
Max. & Avg. Power Consumption (W/m ²)	680/225	640/210	640/210	640/210
Refresh Rate (Hz)	3840	3840	1920	1920
Maintenance Way	Front or Rear			
Installation Way	Front or Rear			
IP Rate	IP20			
Certifications	CE, RoHS, EMC, CCC			

Note: * Specifications are slightly different according to different configurations.
* All rights reserved to SHISAI.

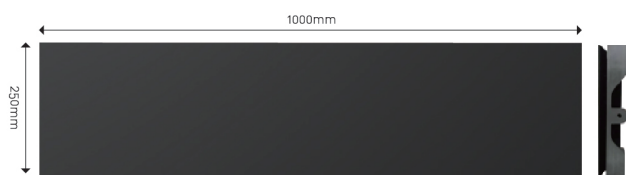


Light and Slim

- 5/6.4kg per panel and 53mm thickness
- A space & installation-cost saver

90°Angle Available

- Liberate your design

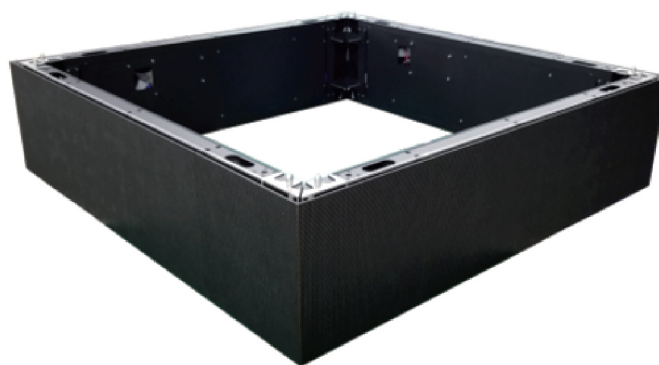

Full-Front Maintenance

- Unlimited installation and convenient maintenance are the basics of it

Wall Mounted

- Breeze series is able to be mounted onto the wall directly in any limited space

